

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
11 December 2003 (11.12.2003)

PCT

(10) International Publication Number
WO 03/103310 A1

- (51) International Patent Classification⁷: **H04Q 7/24**
- (21) International Application Number: **PCT/EP03/05851**
- (22) International Filing Date: **4 June 2003 (04.06.2003)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
02012262.8 **4 June 2002 (04.06.2002) EP**
- (71) Applicant (for all designated States except US): **TELEFONAKTIEBOLAGET LM ERICSSON (PUBL)** [SE/SE]; S-126 25 Stockholm (SE).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **WITZEL, Andreas** [DE/DE]; Els-Brandstroem-Strasse 27A, 52134 Herzogenrath (DE). **ANDERSSON, Jyri** [FI/DE]; Ottenfelder Strasse 11, 52477 Alsdorf (DE).
- (74) Agent: **TONSCHEIDT, Andreas**; Ericsson Eurolab Deutschland GmbH, Ericsson Allee 1, 52134 Herzogenrath (DE).
- (81) Designated States (national): **AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,**

CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


- (84) Designated States (regional): **ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).**

Declaration under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations **AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian**

[Continued on next page]

- (54) Title: **OPERATION OF A SWITCHING NODE IN A COMMUNICATIONS NETWORK COMPRISING BOTH A LAYERED AND A NON-LAYERED ARCHITECTURAL ENVIRONMENT**

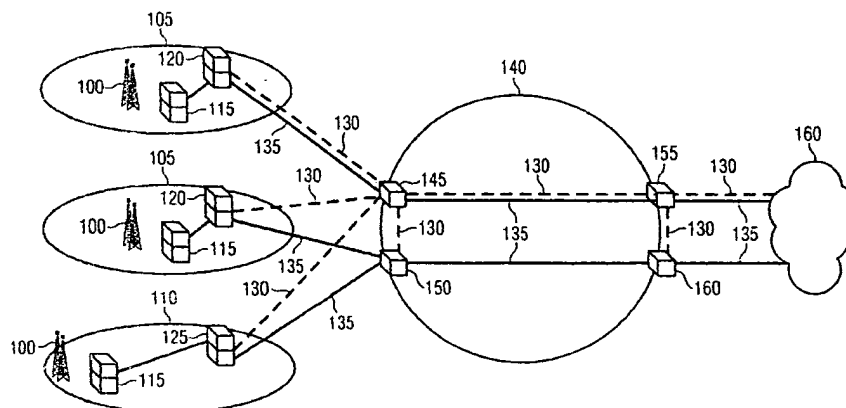

- (57) Abstract: The invention relates to a method for operating a switching node of a communications network, wherein the communications network comprises a layered architectural environment and a non-layered architectural environment. The switching node provides processing capabilities for the processing of communications services both within the layered and the non-layered architectural environment. The method comprises the steps of receiving a communication service request, determining according to at least one predetermined rule as an operation mode, whether the switching node is going to act for a processing of the requested communication service as a switching node of the layered architectural environment or as a switching node of the non-layered architectural environment, and processing the requested communications service in accordance with the determined operation mode of the switching node. The invention relates further to a corresponding network node, communications system and computer program.



patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,
GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR),
OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG)

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

Published:

— with international search report

Operation of a switching node

The invention addresses the field of communication networks. It relates to a method and computer program for operating a switching node in a communications network comprising both a layered architectural environment and a non-layered architectural environment. It
5 relates furthermore to a corresponding network node.

Technological background of the invention

The monolithic network architecture of 2nd generation mobile communications networks (so-called 2G systems) is well known. E.g., the non-layered architecture for a Group Special Mobile GSM circuit switched core network comprises a Mobile Switching Centre MSC/VLR
10 that is connected via the so-called A-interface to the radio access network and via the so-called Lg interface to the further core network of the communications system. The MSC/VLR performs switching tasks in the 2G network. To do so, it processes user data and signalling data, both of which are exchanged with the radio access network by means of the so-called A-interface.

15 A layered network architecture: has been developed for 3rd generation mobile communications systems (so-called 3G systems), e.g. used for the wideband code divisional multiple access WCDMA based Universal Mobile Telecommunications Systems UMTS. The split architecture provides a control plane for the handling of signalling data and a separate user plane for the: handling of user data. Consequently, the MSC/VLR node is being replaced in the split
20 architecture by a MSC-Server in the control plane and a Media-Gateway MGW in the user plane. The MSC-Server processes signalling data related to switching tasks, while the Media-Gateway processes user data related switching tasks.

Architectural details can be found in the following specifications issued by the 3GPP
25 organisation: 3GPP 23.002 version 5.6 *Network Architecture*, in particular chapter 4.1.2; and 3GPP 23.205 version 5.1 *Bearer-independent circuit-switched core network*, in particular in chapter 5.1 for the logical architecture.

In order to provide subscribers with the enhanced services of UMTS, network operators will
30 migrate their networks during a transition period of some years towards the split architecture. However, a lot of operators have certain spare capacity within their GSM networks, and would

like to use it to handle WCDMA traffic instead of buying new MSC-Server nodes. In order to achieve this, the operator would need to configure the existing MSC nodes as MSC servers and then move all the existing GSM traffic to remote MGWs. However, this drastic migration would disrupt the existing GSM traffic.

- 5 Therefore, it is an object of the invention to provide an improved switching node of a communications system and an improved method to control the operation of a switching node of a communications system, which allow for a smooth migration from non-split to split architecture and at the same time allow for minimizing the investments into physical equipments.

10 **Summary of the invention**

This object is solved by the teaching of the independent claims.

The invention provides a method for operating a switching node of a communications network. The communications network comprises a layered architectural environment, in which a user plane layer is provided for user data and a control plane layer is provided for signalling data.

- 15 Furthermore, there is a non-layered architectural environment, which does not provide a split between the user plane and the control plane. The switching node provides processing capabilities for the processing of communications services both within the layered and the non-layered architectural environment. The communications system comprises an access network serving at least one subscriber terminal. The method comprises the steps of receiving a
20 communication service request, determining according to at least one predetermined rule as an operation mode, whether the switching node is going to act for a processing of the requested communication service as a switching node of the layered architectural environment or as a switching node of the non-layered architectural environment, and processing the requested communications service in accordance with the determined operation mode of the switching
25 node.

It should be noted that a switching node in the sense of the invention can be any node or server node for switching functions.

- In a further aspect, the invention provides a network node, in particular a combined MSC/VLR and MSC-Server, of a communications network, wherein the communications network
30 comprises a layered architectural environment, in which a user plane layer is provided for user

data and a control plane layer is provided for signalling data, and a non-layered architectural environment, which does not provide a split between the user plane and the control plane, said switching node comprising an access network interface for the user plane, an access network interface for the control plane, a core network interface for the user plane, a core network interface for the control plane, a media gateway interface, a media gateway operation unit connected to the user plane interfaces adapted to provide media gateway functions, a MSC-Server operation unit connected to the control plane interfaces and the media gateway interface adapted to provide MSC-server functionality, a selection unit adapted to determine for a communication service request received via any control plane interface according to at least one predetermined rule as an operation mode, whether the switching node is going to act for a processing of the requested communication service as a switching node of the layered architectural environment or as a switching node of the non-layered architectural environment, and a processor connected to the interfaces and units of the switching node, said processor being adapted to process a requested communications service in accordance with a determined operation mode of the switching node.

Advantageously, the capability of the switching node to act on a per communications service base, e.g. on a per call base, either as a MSC/VLR or as a MSC-Server leads to an optimised equipment reuse when migrating a network from a non-split architecture to a split architecture. Furthermore, it allows for an operator to control by appropriate configurations of the rules, upon which the acting role of the switching node is determined, a balanced traffic distribution between non-split and split architecture. Additionally, hardware investments inside the switching node are minimized. It is a further advantage that the invention removes the need for a user plane connection between the MSC and the MGW in a certain migration scenario. Furthermore, the invention can be implemented in a simple way. Its low complex design leads to a high quality standard while the testing and maintenance effort is kept low.

Advantageous embodiments of the invention are emphasized in the dependent claims.

In one embodiment of the invention is the communications service request a call set-up request.

In a further embodiment is the at least one predetermined rule configured according to the available network capabilities. Advantageously, this allows an operator to adapt the switching network to individual demands of the network, both in a static and a dynamic way, i.e. during

regular operations as well as during maintenance periods. The provided scalability allows for an operator to adapt any network changes- manually or automatically -in a flexible and efficient way.

5 In another embodiment is a plurality of incoming routes from the access network to the switching node provided. At least one predetermined rule comprises an assignment of a dedicated incoming route to an operation mode of the switching node. The communication service request originates from the subscriber terminal, and the step of determining the operation mode comprises the determination of the incoming route of the communication service request and a comparison of the determined incoming route against the predetermined
10 rules.

In a further embodiment provides the communications system access to subscribers by means of at least two different access technologies, e.g. by means of GSM and UMTS. At least one predetermined rule comprises an assignment of a dedicated access technology to an operation
15 mode. The communication service request originates from a subscriber terminal, and the step of determining the operation mode comprises the determination of the access technology used by the subscriber terminal and a comparison of the determined access technology against the predetermined rules.

In another embodiment originates the communication service request from a subscriber
20 terminal and comprises an identifier of a communications service terminating party, e.g. a phone number of the party. At least one predetermined rule comprises an assignment of the identifier to a dedicated operation mode, and the step of determining the operation mode comprises the determination of the identifier and a comparison of the determined identifier against the predetermined rules.

25 In a further embodiment indicates at least one predetermined rule by means of a statistical distribution factor a distribution, for how many received communications service requests the switching node shall act as a switching node of the layered architectural environment or as a switching node of the non-layered architectural environment. This allows an operator by means of an appropriate selection of the statistical distribution factor to use the available network
30 capacity in a most efficient way.

In another embodiment comprises the determination of the operation modes a determination of a current load level of the switching node in at least one operation mode, and the determined operation mode depends on the determined load level. This allows for adapting the operational mode of the switching node to the currently available network load.

5

In a further embodiment requests the communication service request a subscriber terminal terminating communications service. At least one predetermined role comprises an assignment of an access technology available to the subscriber terminal to a dedicated operation mode, and the step of determining the operation mode comprises the determination of the access
10 technology available to the terminating subscriber terminal. The determined operation mode depends on the determined access technology.

In another embodiment processes the switching node the requested communications service in a role of a MSC/VLR, if the switching node is determined to act as a switching node of the non-layered architectural environment of the communications system.

15 In a further embodiment processes the switching node the requested communications service in a role of a MSC-Server, if the switching node is determined to act as a switching node of the layered architectural environment of the communications system.

In a further embodiment comprises the determination of the operation mode a determination of
20 at least one of a group of an origin of the communications service request and a destination of the communications service request, and the determined operation mode depends on the at least one determined member of the group.

In another embodiment is the switching node determined to act as a switching node of the non-
25 layered architectural environment of the communications system, if an origin of the communications service request, in particular an originating radio network node, is local to the switching node, and a destination indicated by the communications service request is local to the switching node.

30 In a further embodiment is the switching node determined to act as a switching node of the layered architectural environment of the communications system, if an origin of the communications service request, in particular an originating radio network node, is remote to

the switching node, and a destination indicated by the communications service request is remote to the switching node.

5 In another embodiment applies the switching node local switching, if an origin of the communications service request, in particular an originating radio network node, is local to the destination indicated by the communications service request. In other words, the switching node supports local switching in particular by other nodes in order to avoid unnecessary data transmissions.

10 In a further embodiment is the switching node determined to act as a switching node of the layered architectural environment of the communications system, if an origin of the communications service request, in particular an originating radio network node, is remote to the switching node, and a destination indicated by the communications service request is local to the switching node.

15 In another embodiment is the switching node determined to act as a switching node of the layered architectural environment of the communications system, if an origin of the communications service request, in particular an originating radio network node, is local to the switching node, and a destination indicated by the communications service request is remote to
20 the switching node.

In another embodiment refers the invention to a network node, in particular a combined MSC/VLR and MSC-Server, adapted to operate according to the described method.

Another embodiment refers to the network node comprising means for storing, in particular a lookup table, of network node identifiers and related indications, indicating whether the
25 identified network nodes are local or remote to the network node.

In a further embodiment comprises a communications system a network node according to the invention.

Another embodiment of the invention refers to a communications system comprising a layered
30 architectural environment, in which a user plane layer is provided for user data and a control

plane layer is provided for signalling data, and a non-layered architectural environment, which does not provide a split between the user plane and the control plane, wherein a switching node, in particular a combined MSC/VLR-MSC Server, provides processing capabilities for the processing of communications services both within the layered and the non-layered architectural environment, and wherein at least one further network nodes served by said switching node is remote to said switching node.

Another embodiment refers to a computer program, loadable into the internal memory of a digital processing unit and comprising software code portions adapted to control the steps according to the inventive method, when the computer program is executed on the digital processing unit.

In a further embodiment is the computer program stored on a computer-readable medium like a CD-ROM, a floppy disc, optical disc or hard disk. Therefore, a good physical portability of the control software is provided, i.e. upgrades can be performed in an easy way.

In the following is the invention explained in detail with reference to the figures, which show:

Fig. 1: a simplified network architecture that supports both layered and non-layered operation modes of network elements for switching functions.

Fig. 2: in a block diagram a network element for switching functions that supports both layered and non-layered operation modes,

Fig. 3: a determination of the operation mode of the network element for a mobile originating communication service request,

Fig. 4: a determination of the operation mode of the network element for a mobile terminating communication service request, and

Fig. 5: a simplified communications system according to the invention.

Detailed description of embodiments of the invention

Same reference signs are used in the following for similar features in the different figures.

Fig. 1 illustrates an example of a communications network that supports both layered and non-layered operation modes of network elements for switching functions. Such a network architecture is applicable for operators e.g. during a transition period from 2G systems to 3G

systems. The figure shows GSM based radio access networks 105, also called Base Station System BSS. A BSS according to the simplified example comprises a Base Transceiver Station BTS 115, a Base Station Controller 120 and an antenna system 100. Furthermore, a WCDMA based radio access network 110- called UTRAN -is shown in the figure. It comprises a BTS 115 and a Radio Network Controller RNC 1.25.

The nodes 145, 150, 155, 160 of the core network are connected via a backbone 140, preferably via an Internet Protocol IP backbone. There are Media Gateways MGW 150, 160 connected via user data connections 135 to the radio access networks 105, 110, to each other and to an external PSTN/ISDN network 160. Network nodes for switching functions 145, 155 are connected both via user data connections 135 and signalling data connections 130 to each other. Whether both user data connections 135 and signalling data connections 130 are provided towards the radio access networks 105, 110, and which data connections are supported in the network in general, depends on the preference of the operator. In any case, a network node 145 connected to a radio access network needs a signalling data connection 130.

If the network node for switching functions 145, 155 has a connection for signalling data 130, and an interface towards a MGW, it can fulfil processing tasks of an MSC-Server. If the network node 145, 155 has additional user data connections 135, it can act on a per call base either as a MSC-Server or as a MSC/VLR. This operation mode does not depend on the type of the radio network 105, 110 connected to the network node. Instead, it depends just on the appropriate data connections available and the corresponding configuration of the node itself.

Therefore, a network node 145, 155 according to the invention can be operated in two modes. It can act for a processing of a requested communication service as a switching node of a layered architectural environment of the network, i.e. within a framework of split control plane and user plane, or as a network node of a non- layered architectural environment, i.e. by processing both user data and signalling data.

Essential elements of such an inventive network node are illustrated in the block diagram of Fig. 2. The network node, which can be in particular a combined MSC/VLR and MSC-Server of a communications network, comprises an access network interface for the user plane 200, an access network interface for the control plane 230, a core network interface for the user plane 220, a core network interface for the control plane 250 and a media gateway interface 260. A media gateway operation unit 210 is connected to the user plane interfaces 200, 220. It

provides usual media gateway functions. A MSC-Server operation unit 240 is connected to the control plane interfaces 230, 250 and to the media gateway interface 260. The MSC-Server operation unit 240 provides well-known MSC-server functionality. A selection unit 280 determines for an incoming communication service request, indicating e.g. a call set-up request message, received via a control plane interface 230, 250 an operation mode of the network element. In other words, on a per call base is determined, whether the network node acts as a MSC/VLR or as a MSC- Server. The determination of the operation mode will be explained in more detail with reference to the figures 3 and 4.

However, the determination of the operation mode is performed according to predetermined rules that are stored preferably in a memory (not shown in the figure) of the selection unit 280. The rules can be configured by the operator of the network according to its individual demands and in accordance with the capabilities of the network. This means, e.g., that a configuration of the network node under certain conditions as a MSC/VNLR can be valid only, if the required signalling and data connections are available for these conditions.

Preferably, the selection unit 280 provides a configuration interface (not shown in the figure) to allow for a configuration or adaptation of the rules according to which the operation modus of the network node is determined.

The network node comprises a processor 270, which is connected to the interfaces and units of the network node preferably via a processor bus (not shown in the figure). The processor 270 takes care for the determination of the operation mode upon receipt of a communication service request, and processes the requested communications service in accordance with a determined operation mode.

Fig. 3 shows a mobile originating access scenario, in which a call set-up message 390 is received via a signalling interface from a radio network. The selection unit 280 determines whether the processing request is fulfilled by the network node acting as a MSC/VLR or a MSC-server depending on the incoming route from the radio access network of the request message, on the access technology used by the subscriber terminal that has originated the request, on the dialed destination, i.e. on the B-number of the called party, and on a statistical distribution factor.

The incoming route of the call-set-up request message is preferably determined by means of the Signalling System No.7 SS7, of which protocol stacks are commonly used in mobile communications systems e.g. for the transmission of call-set-up request messages. In particular, the incoming route information can be derived from the Originating Point Code
5 OPC that is given in the Signalling Information Field SIF in the Message Transfer Part level 3 protocol layer of the SS7. Details about the well-known SS7 can be found in the ITU-T recommendations Q.701-Q.707 and ITU-T Q.2210.

An OPC configuration table 300 shows the roles for the evaluation of the OPC. E.g., if the OPC is '123', the MSC/VLR mode is determined. If OPC is '456', the MSC- Server mode is
10 chosen.

The access type can be retrieved from the used protocol, by means of which the set-up message has been transmitted. If a BSS Application Part BSSAP has been used, MSC/VLR mode is selected. If Radio Access Network Application Part RANAP has been used, MSC-Server mode is activated. The corresponding configuration is shown in the access type indicator table 310 in
15 Fig. 3.

The dialed destination criterion can be evaluated e.g. by means of a complete or a partial B-number analysis. The example illustrates a configuration, in which any B- number beginning with '49241' leads to the selection of MSC/VLR node, while a B-number starting with '49228' leads to the MSC-Server mode operation. '49211' just results in a preference for the MSC-
20 Server mode, and no preference is indicated according to the configuration shown in the B-No. table 320 for the string '492407'.

E.g. for the purpose of load balancing, an operator can configure the selection unit 280 in a way that a certain percentage of all communications service requests are processed in a certain mode. The distribution table 330 indicates by means of statistical distribution factors such a
25 configuration. For the given example, 70 percent of all communications service requests shall be processed in the MSC/VLR mode, while 30 percent shall apply to the MSC-Server mode. The selection unit therefore keeps track of the processing history of the node in order to fulfil the distribution requirement.

The different network node operation modes of the example are summarized in the mode table
30 340. An additional priority table indicates, which of the given configuration settings have

priority in the case of any inconsistencies. E.g., if the OPC table indicates a certain operation mode, and the statistical distribution factor evaluation leads to a different mode, the OPC gains in the given example priority. It shall be noted that corresponding evaluation and priority rules can be implemented in different ways, e.g. via so-called look-up tables as shown in the
5 example, or by an algorithm or others.

Figure 4 illustrates a mobile terminating access scenario. The selection unit decides on receipt of a 'provide roaming number' Mobile Application Part MAP message 400 indicating a mobile terminating communication, which operation modulus is selected. The decision is based on the access technology that the terminating subscriber terminal uses, and on a statistical distribution
10 factor, which can be the same or different from the factors given in the mobile originating case as shown in Fig.3.

Corresponding rules are shown in the modulus table 410 of Fig. 4. In this example, all available parameters are summarized in just one table.

- 15 The decision about the operation modulus can be made already at provision of the Mobile Station Roaming Number towards the Home Location Register HLR of the network. If the network node operates as a MSC/VLR, a roaming number from a pool of numbers leading to an incoming route of the MSC/VLR is used. If the MSC- Server mode is selected, a roaming number from a pool of numbers leading to a remote route on a Media Gateway is used.
- 20 It shall be noted that the described parameters and selection criterions are examples. The selection of the operation mode can in general depend on just one parameter or on a plurality of parameters in any combination on an operator's demand.

The inventive network node allows for the processing of transit calls. Therefore, the selection unit 280 selects the operation mode based on an incoming route information in a similar way as
25 explained with reference to figure 3. If a call comes in on a remote MGW, also the outgoing route will be selected for a remote MGW. If the call arrives on a route to the MSC/VLR, also the outgoing route is selected to be towards an MSC/VLR.

In the case of a handover request or a SRNS relocation ensures the selection unit 280 that the call stays on the already selected MGW or MSC/VLR, provided that the necessary data
30 connections are available. Otherwise, the handover or SRNS relocation request is preferably

rejected.

A further embodiment refers to a good liability. In case a MGW fails, the operation mode selection mechanism is aborted and the non-split operation as MSC/VLR is chosen always. In
5 other words, a fallback to the monolithic MSC/VLR mode is performed.

An alternative embodiment avoids the connection of all radio access nodes to the MSC/VLR and MGW. In other words, it is not required that all radio access nodes controlled by the switching node provide transmission connections towards the MGW and the switching node.
10 Otherwise, full transmission connections could be costly or even not achievable in situations where the radio access node and/or the MGW are located far away from the switching node. This is typically the case in large countries or countries with an unbalanced population distribution.

15 Fig. 5 illustrates the scenario. The MSC node with the operation mode selection mechanism is located in a so-called capital city. Also located there are radio access network nodes (without being limited to, the example of Fig. 5 shows BSCs) and a MGW. In the remote cities there is just a MGW and also a radio access node. The mechanism to select the operation mode of the switching node takes into account as additional parameters the origin of the call, e.g. the
20 originating radio access network node, and / or the destination of the call, e.g. the destinating radio access network node.

The selection mechanism performs at least one of the following: If a call originates and terminates in BSC nodes in the capital city, MSC/VLR (non-layered architecture) is chosen. If a call originates in a BSC nodes in a remote city and terminates in BSC nodes in any other
25 remote city, MSC Server (layered architecture) is chosen. If a call originates and terminates in BSC nodes in the same remote city, MSC Server (layered architecture) is chosen and local switching is applied. If a call originates in a BSC node in any remote city and terminates in BSC nodes in the capital city, MSC Server (layered architecture) is chosen. If a call originates in a BSC node in the capital city and terminates in BSC nodes in any remote city, MSC Server
30 (layered architecture) is chosen.

Whether a certain BSC node is located remotely or is local to the MSC Node is preferably derived from a predefined lookup table.

Claims

1. Method for operating a switching node of a communications network, wherein the communications network comprises a layered architectural environment, in which a user plane
5 layer is provided for user data and a control plane layer is provided for signalling data, and a non-layered architectural environment, which does not provide a split between the user plane and the control plane, wherein the switching node provides processing capabilities for the processing of communications services both within the layered and the non-layered architectural environment, and wherein the communications system comprises an access
10 network serving at least one subscriber terminal, comprising the steps
- receiving a communication service request,
 - determining according to at least one predetermined rule as an operation mode, whether the switching node is going to act for a processing of the requested communication
15 service as a switching node of the layered architectural environment or as a switching node of the non-layered architectural environment,
 - processing the requested communications service in accordance with the determined operation mode of the switching node.
- 20 2. Method according to claim 1, wherein the communications service request is a call set-up request.
3. Method according to claim 1 or 2, wherein the at least one predetermined rule is configured according to the available network capabilities.
- 25 4. Method according to claim 1, 2 or 3, wherein a plurality of incoming routes from the access network to the switching node are provided, at least one predetermined rule comprises an assignment of a dedicated incoming route to an operation mode of the switching node, the communication service request originates from the subscriber terminal, and wherein the step of
30 determining the operation mode comprises the determination of the incoming route of the communication service request and a comparison of the determined incoming route against the predetermined rules.

5. Method according to any preceding claim, wherein the communications system provides access to subscribers by means of at least two different access technologies, at least one predetermined rule comprises an assignment of a dedicated access technology to an operation mode, the communication service request originates from a subscriber terminal, and wherein
5 the step of determining the role of operation comprises the determination of the access technology used by the subscriber terminal and a comparison of the determined access technology against the predetermined rules.

6. Method according to any of the preceding claims, wherein the communication service
10 request originates from a subscriber terminal and comprises an identifier of a communications service terminating party, at least one predetermined rule comprises an assignment of the identifier to a dedicated operation mode, and wherein the step of determining the operation mode comprises a determination of the identifier and a comparison of the determined identifier against the predetermined rules.

15 7. Method according to any of the preceding claims, wherein at least one predetermined rule indicates by means of a statistical distribution factor a distribution, for how many received communications service requests the switching node shall act as a switching node of the layered architectural environment or as a switching node of the non-layered architectural
20 environment.

8. Method according to any of the preceding claims, wherein the determination of the role of operations comprises a determination of a current load level of the switching node in at least one operation mode, and wherein the determined operation mode depends on the determined
25 load level.

9. Method according to any of the claims 1, 2, 3, 7 or 8, wherein the communication service request requests a subscriber terminal terminating communications service, wherein at least one predetermined rule comprises an assignment of an access technology available to the
30 subscriber terminal to a dedicated operation mode, and wherein the step of determining the operation mode comprises the determination of the access technology available to the

terminating subscriber terminal, and the determined operation mode depends on the determined access technology.

10. Method according to any of the preceding claims, wherein the switching node
5 processes the requested communications service in an operation mode of a MSC/VLR, if the switching node is determined to act as a switching node of the non-layered architectural environment of the communications system.
11. Method according to any of the claims 1 to 9, wherein the switching node processes the
10 requested communications service in an operation mode of a MSC-Server, if the switching node is determined to act as a switching node of the layered architectural environment of the communications system.
12. Method according to any of the preceding claims, wherein the determination of the
15 operation mode comprises a determination of at least one of a group of an origin of the communications service request and a destination of the communications service request, and wherein the determined operation mode depends on the at least one determined member of the group.
- 20 13. Method according to any preceding claims, wherein the switching node is determined to act as a switching node of the non-layered architectural environment of the communications system, if an origin of the communications service request, in particular an originating radio network node, is local to the switching node, and a destination indicated by the communications service request is local to the switching node.
- 25 14. Method according to any preceding claims, wherein the switching node is determined to act as a switching node of the layered architectural environment of the communications system, if an origin of the communications service request, in particular an originating radio network node, is remote to the switching node, and a destination indicated by the
30 communications service request is remote to the switching node.

15. Method according to claim 14, wherein the switching node applies local switching, if an origin of the communications service request, in particular an originating radio network node, is local to the destination indicated by the communications service request.
- 5 16. Method according to any preceding claims, wherein the switching node is determined to act as a switching node of the layered architectural environment of the communications system, if an origin of the communications service request, in particular an originating radio network node, is remote to the switching node, and a destination indicated by the communications service request is local to the switching node.
- 10 17. Method according to any preceding claims, wherein the switching node is determined to act as a switching node of the layered architectural environment of the communications system, if an origin of the communications service request, in particular an originating radio network node, is local to the switching node, and a destination indicated by the
- 15 communications service request is remote to the switching node.
18. Network node, in particular a combined MSC/VLR and MSC-Server, adapted to operate according to any of the preceding claims.
- 20 19. Network node, in particular a combined MSC/VLR and MSC-Server, of a communications network, wherein the communications network comprises a layered architectural environment, in which a user plane layer is provided for user data and a control plane layer is provided for signalling data, and a non-layered architectural environment, which does not provide a split between the user plane and the control plane, said network node
- 25 comprising an access network interface for the user plane, an access network interface for the control plane, a core network interface for the user plane, a core network interface for the control plane, a media gateway interface, a media gateway operation unit connected to the user plane interfaces adapted to provide media gateway functions, a MSC-Server operation unit connected to the control plane interfaces and the media gateway interface adapted to provide
- 30 MSC-server functionality, a selection unit adapted to determine for a communication service request received via any control plane interface according to at least one predetermined rule as an operation mode, whether the switching node is going to act for a processing of the requested

communication service as a switching node of the layered architectural environment or as a switching node of the non-layered architectural environment, and a processor connected to the interfaces and units of the switching node, said processor being adapted to process a requested communications service in accordance with a determined operation mode of the network node.

5

20. Network node according to claim 19, comprising means for storing, in particular a lookup table, of network node identifiers and related indications, indicating whether the identified network nodes are local or remote to the network node.

10 21. Communications system comprising a network node according to claim 18, 19 or 20.

22. Communications system comprising a layered architectural environment, in which a user plane layer is provided for user data and a control plane layer is provided for signalling data, and a non-layered architectural environment, which does not provide a split between the user plane and the control plane, wherein a switching node, in particular a combined
15 MSC/VLR-MSC Server, provides processing capabilities for the processing of communications services both within the layered and the non-layered architectural environment, and wherein at least one further network nodes served by said switching node is remote to said switching node.

20

23. Computer program, loadable into the internal memory of a digital processing unit, comprising software code portions adapted to control the steps according to any of the method claims, when the computer program is executed on the digital processing unit.

25 24. Computer program according to the preceding computer program claim, wherein the computer program is stored on a computer-readable medium.

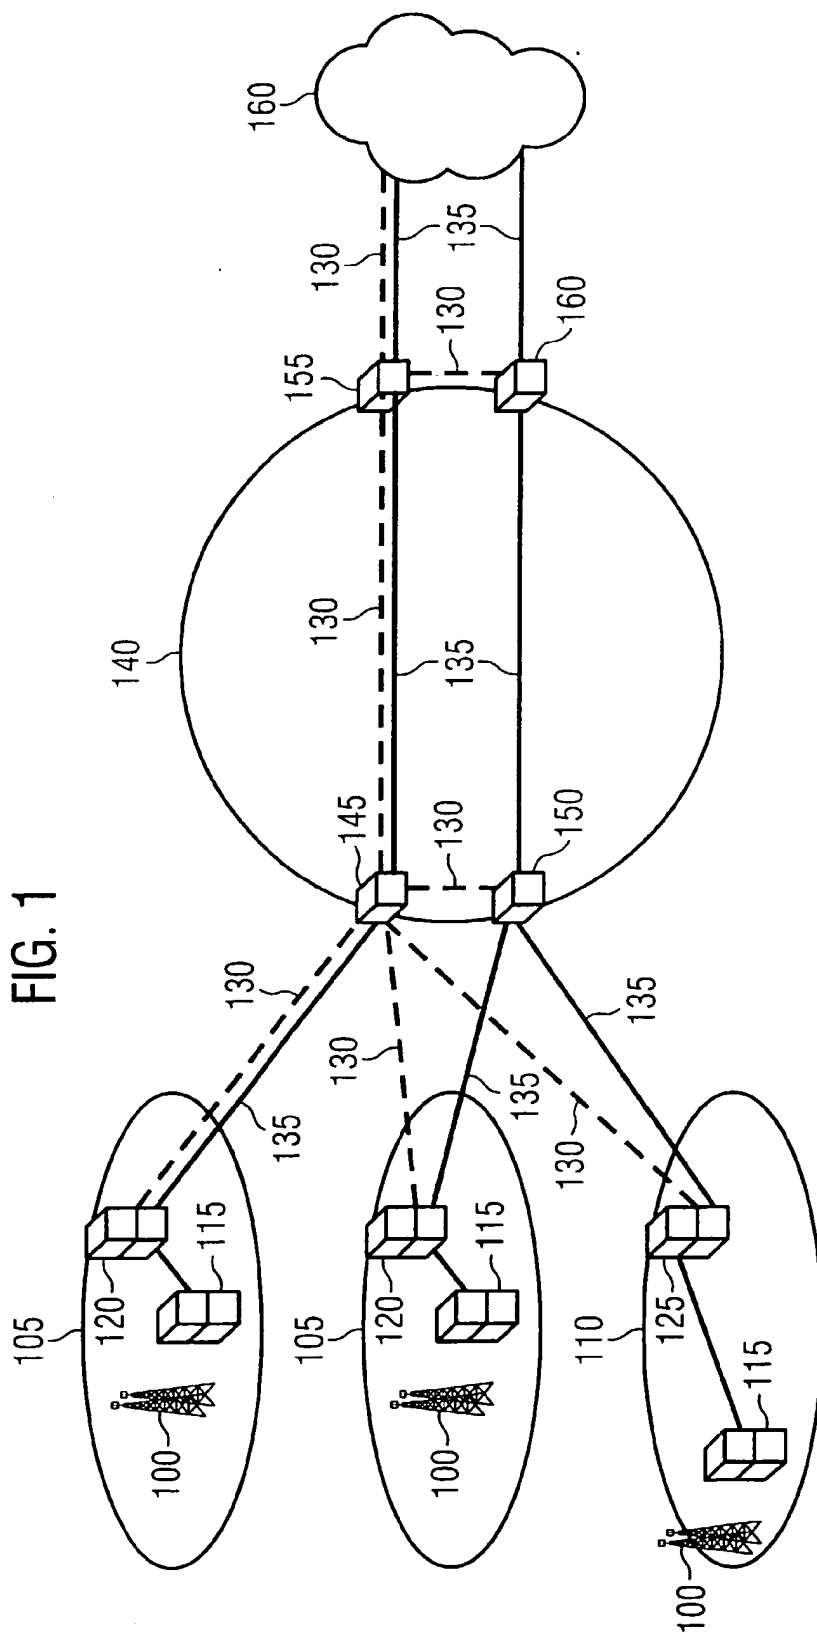


FIG. 2

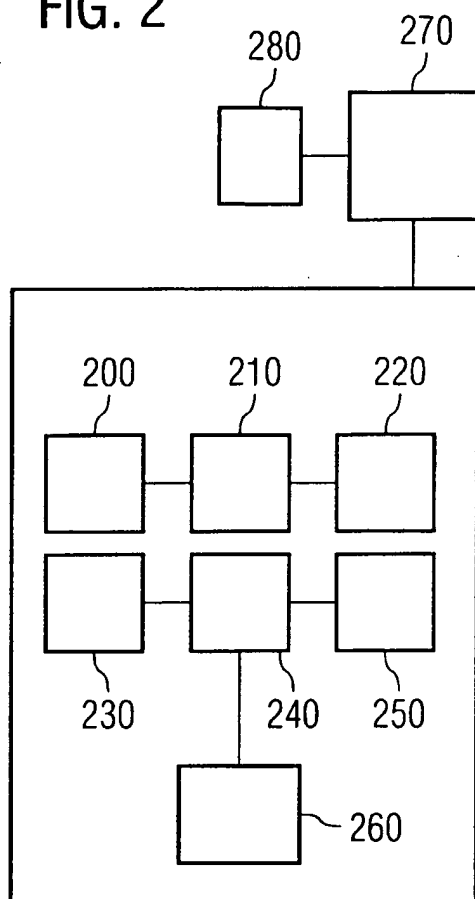


FIG. 3



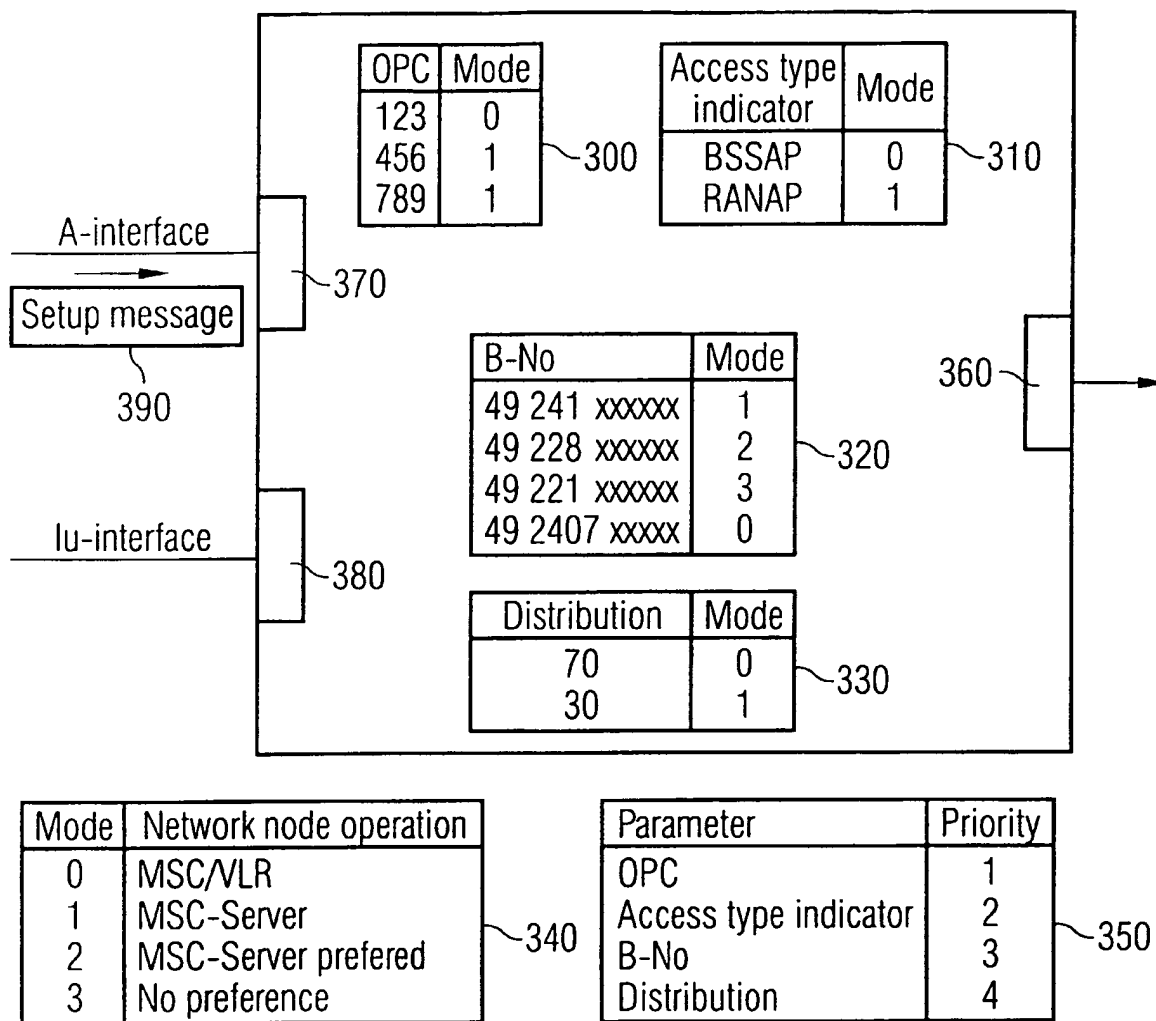


FIG. 4

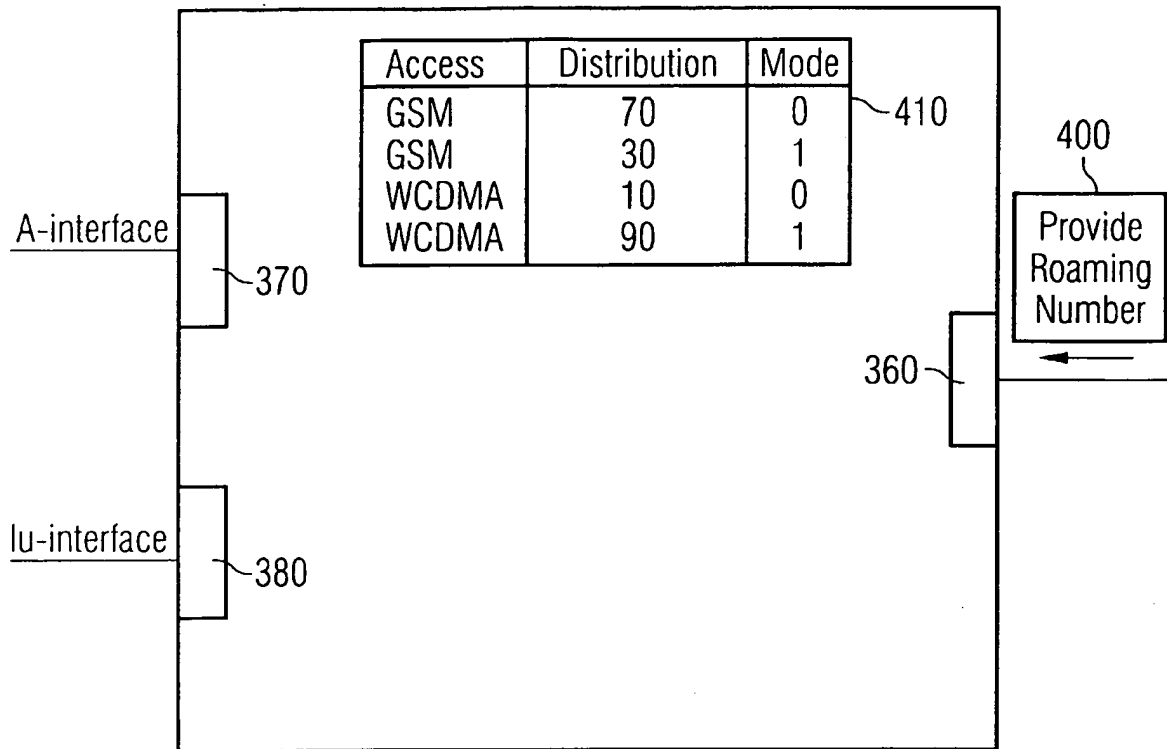

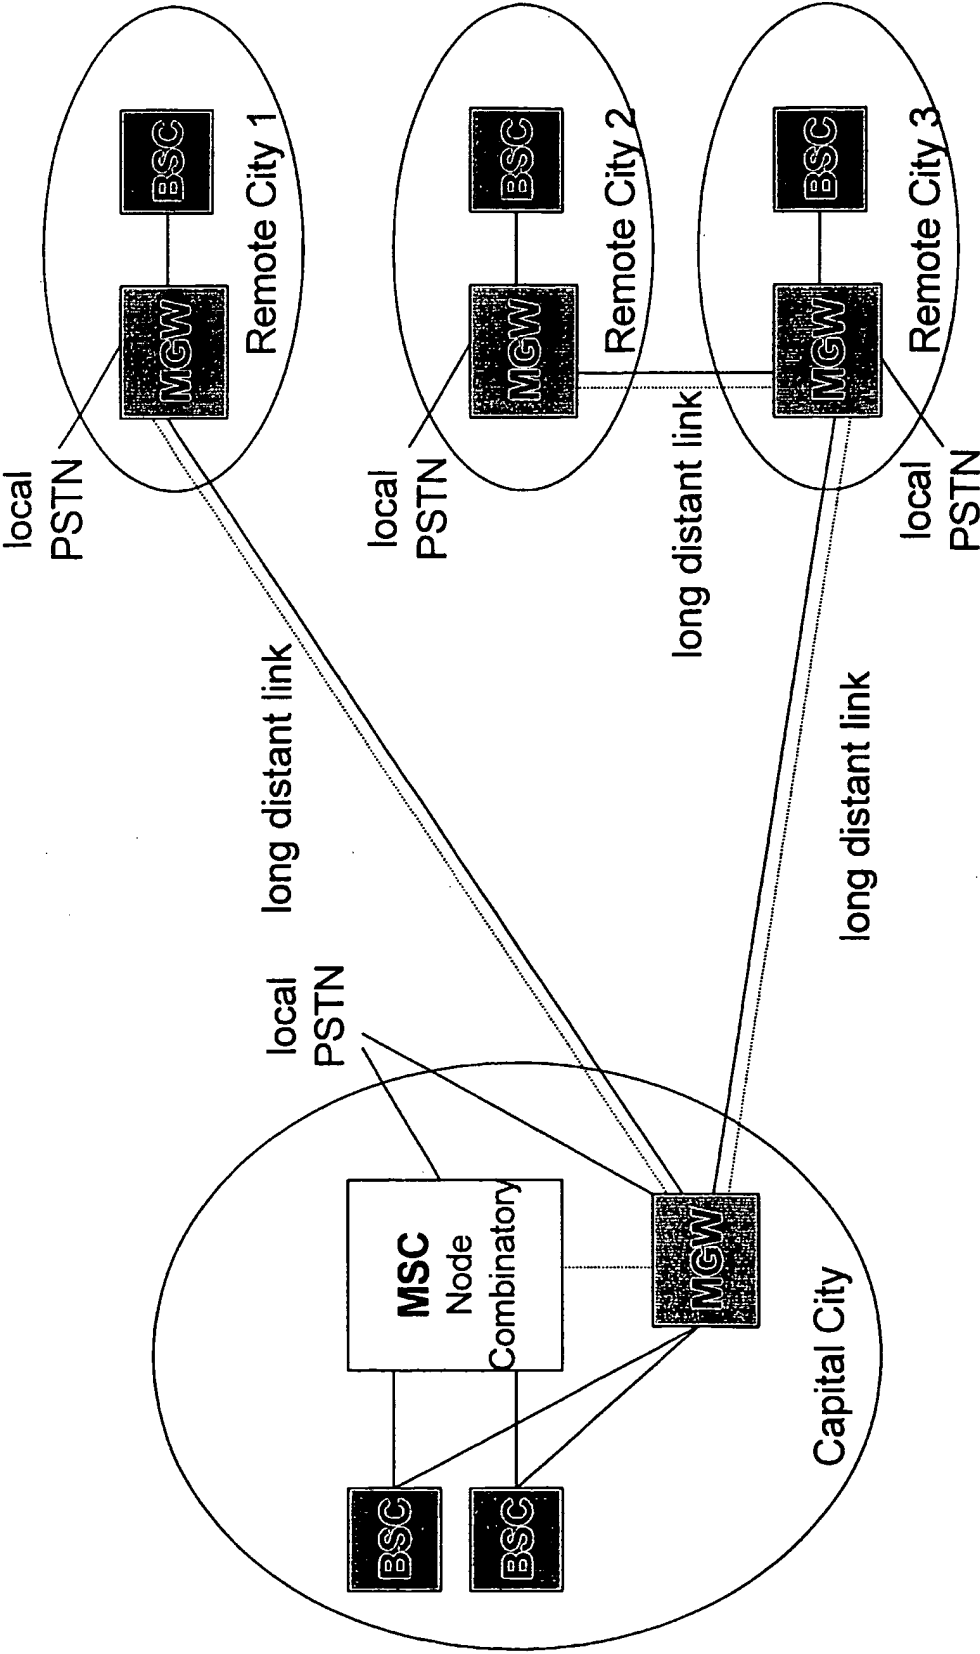

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/05851

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04Q7/24

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 01 15475 A (SIVAGNANASUNDARAM SUTHA ;ROBERTS MICHAEL (GB); PALAT SUDEEP KUMAR) 1 March 2001 (2001-03-01) page 6, line 6 -page 7, line 26; figure 3 ---	1,2,4,5; 9-24
A	"Digital cellular telecommunications system (Phase 2+) (GSM);Universal Mobile Telecommunications System (UMTS); Network architecture (3GPP TS 23.002 version 4.3.0 Release 4)" ETSI TS 123 002 V4.3.0, XX, XX, June 2001 (2001-06), pages 1-42, XP002200605 figure 1 ---	1,2,4,5, 9-24
A	EP 1 182 900 A (LUCENT TECHNOLOGIES INC) 27 February 2002 (2002-02-27) --- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

29 August 2003

Date of mailing of the international search report

04/09/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Schut, G

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/05851

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 01 13657 A (ERICSSON TELEFON AB L M) 22 February 2001 (2001-02-22) -----	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/05851

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0115475	A	01-03-2001	AU 5528800 A	19-03-2001
			WO 0115475 A1	01-03-2001
			EP 1203502 A1	08-05-2002
<hr/>				
EP 1182900	A	27-02-2002	CA 2350012 A1	07-02-2002
			EP 1182900 A1	27-02-2002
			JP 2002118868 A	19-04-2002
<hr/>				
WO 0113657	A	22-02-2001	AU 6275500 A	13-03-2001
			BR 0013363 A	30-04-2002
			CA 2381622 A1	22-02-2001
			CN 1379961 T	13-11-2002
			WO 0113657 A1	22-02-2001
			EP 1205082 A1	15-05-2002
			JP 2003507945 T	25-02-2003
<hr/>				